


LIVE SWEEP INSTALLATION INSTRUCTIONS

1. Mount the LiveSweep to your Trolling Motor according to your specific installation.
2. Run the cable from the LiveSweep to desired location where you will mount the control box.
3. Run the cable from the foot control to control box.
4. Clip in plugs from LiveSweep motor and the Foot Pedal. The plugs are color and shape coded so you cannot mix them up.
5. Connect 12 volt power to the 2 connections on the side of control box labeled +12V and GND. Make sure the correct wires are connected to the specific terminals. Use 5 AMP fuse on positive side of incoming 12 volt power.
6. Make sure both your power wire and red wire in box are connected in control box.

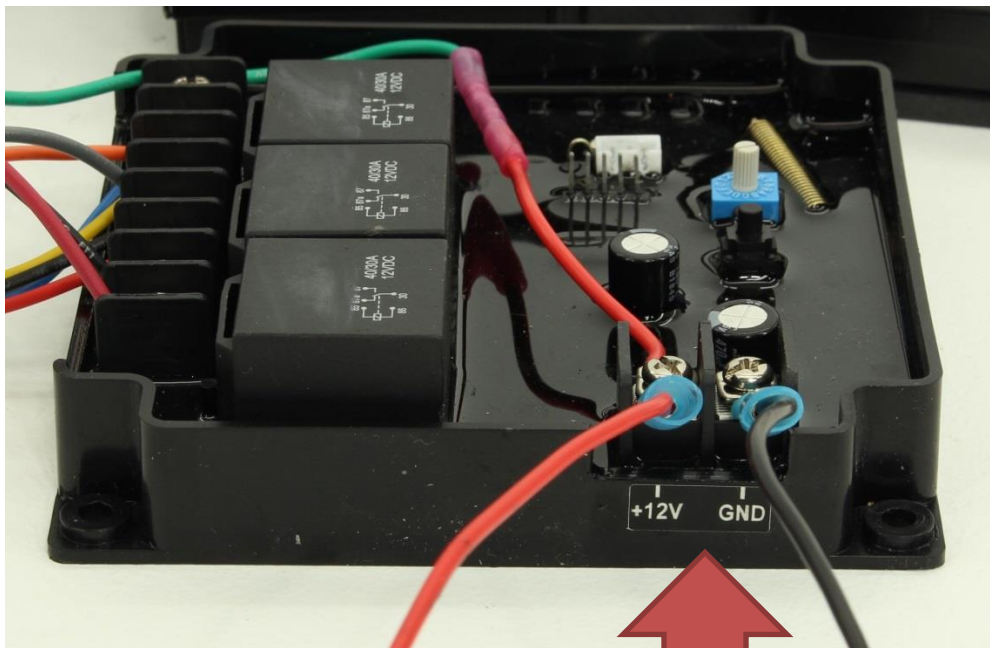

INCOMING 12 VOLT POWER